

05-30-00

H

Attorney Docket No.: PALM-3085.US.P

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE****Patent Application**

I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date of deposit.			
Express Mail Label No.:	EE588900447US	Name of Person Making the Deposit:	ANTHONY CHOU
Date of Deposit:	05/25/00	Signature of the Person Making the Deposit:	<i>Anthony Chou</i>

Inventor(s): Rocco A. DiValentino

Title: METHOD AND SYSTEM FOR ADAPTIVE DATA SYNCHRONIZATION AND  
TRANSPORT ACROSS MULTIPLE DATA TRANSPORT INFRASTRUCTURE

The Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Sir:

Transmittal of a Patent Application  
(Under 37 CFR §1.53)

Transmitted herewith is the above identified patent application, including:

- ☒ Specification, claims and abstract, totaling 33 pages.  
☐ Formal drawings, totaling \_\_\_\_\_ pages.  
☒ Informal drawings, totaling 15 pages.  
☒ Declaration and Power of Attorney.  
☐ Information Disclosure statement.  
☐ Form 1449  
☐ Assignment(s)  
☐ Assignment Recordation Form (duplicate)  
☐ Preliminary Amendment

Other: \_\_\_\_\_

**FEES DUE**

The fees due for filing the specification pursuant to 37 C.F.R. § 1.16 and for recording of the Assignment, if any, are determined as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEES
Basic Application Fee					\$690.00
Total Claims	21	Minus 20=	1	X \$18 =	\$18.00
Independent Claims	3	Minus 3=	0	X \$78=	\$0.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Add Assignment Recording Fee of \$40.00 If Assignment document is enclosed					\$0.00
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$708.00</b>

## PAYMENT OF FEES

The full fee due in connection with this communication is provided as follows:

1. Not enclosed
  - ☐ No filing fee is to be paid at this time.
2. Enclosed
  - ☒ Filing fee
  - ☐ Recording assignment
  - ☐ Petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or cannot be reached
  - ☐ For processing an application with specification in a non-English language
  - ☐ Processing and retention fee
  - ☐ Fee for international-type search report
  - ☒ The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No.: 23-0085. A duplicate copy of this authorization is enclosed.
  - ☒ A check in the amount of \$708.00
  - ☐ Charge any fees required or credit any overpayments associated with this filing to Deposit Account No.: 23-0085.

This application is filed pursuant to 37 C.F.R. § 1.53 in the name of the above-identified Inventor(s).

Please direct all correspondence concerning the above-identified application to the following address:

**WAGNER, MURABITO & HAO LLP**  
Two North Market Street, Third Floor  
San Jose, California 95113  
(408) 938-9060

- ☒ This transmittal ends with this page.

Respectfully submitted,

Date: 5/25/00

By: Ronald M. Pomeroy  
Ronald M. Pomeroy  
Reg. No. 43,009

PALM 3085 US P

UNITED STATES PATENT APPLICATION FOR

METHOD AND SYSTEM FOR ADAPTIVE DATA SYNCHRONIZATION AND  
TRANSPORT ACROSS MULTIPLE DATA TRANSPORT INFRASTRUCTURES

Inventor:

Rocco A. DiValentino

Prepared by:

WAGNER, MURABITO & HAO LLP  
TWO NORTH MARKET STREET  
THIRD FLOOR  
SAN JOSE, CALIFORNIA 95113  
(408) 938-9060

METHOD AND SYSTEM FOR ADAPTIVE DATA SYNCHRONIZATION AND  
TRANSPORT ACROSS MULTIPLE DATA TRANSPORT INFRASTRUCTURES

BACKGROUND OF THE INVENTION

5        FIELD OF THE INVENTION

The present invention relates to the field of data processing systems. Specifically, the present invention relates to a method and system for adapting data synchronization and transport between a host computer system and a peripheral computer system, the adaptation depending on the transport  
10    infrastructure used.

RELATED ART

As the components required to build a computer system have reduced in size, new categories of computer systems have emerged. One of the new  
15    categories of computer systems is the "palmtop" computer system. A palmtop computer system (otherwise known as a personal digital assistant or PDA) is a computer that is small enough to be held in the hand of a user and can be "palm-sized." Most PDA computer systems are used to implement various Personal Information Management (PIM) applications such as an address book,  
20    a daily organizer and electronic notepads, to name a few.

It has proven convenient to transfer data between a PDA and other computer systems. For example, a PDA may send or retrieve e-mail; synchronize an address book, a daily organizer, or an electronic notepad; or  
25    download software from a host system. Furthermore, the PDA may exchange

data with the host system. For example, the PDA may be used to enter sales data into a corporate server. In some cases, the other computer system is a desktop computer located a few feet from the PDA, in other cases, the other computer system may be a server located across the continent. PDAs may also  
5 exchange data with devices such as cellular phones, as well as other PDAs.

To perform these data exchanges, PDAs may connect to other computers and devices in a variety of ways. For example, when synchronizing with a desktop computer, the user inserts the PDA into a serial cradle device, which  
10 connects to the desktop via a serial cable. When connecting to a remote server, the PDA may first contact a network via a modem. The network itself may then connect to the remote server in a variety of ways. If the PDA's user does not have access to a modem, the PDA may be used to connect to a cellular phone via radio frequency. The cellular phone then connects further down the chain to  
15 get at the desired data. Alternatively, the PDA may be inserted into a network cradle to make the connection. Thus, the user of a PDA may use a variety of transport mechanisms (e.g., RF, IR, wireless, serial cable, network cradle) to make the connection to the desired data source.

20 Significantly, these transport mechanisms have different bandwidths, reliabilities, security characteristics, proximities, and cost characteristics. For example, wired transport mechanisms vary in speed from Fast Ethernet to analog modems. Wireless transport mechanisms vary in bandwidth also, from relatively fast 802.11 wireless LAN to slower Mobitex. Furthermore, the different  
25 transport mechanisms present different security concerns. Therefore, ideally,

when using different transport mechanisms, different parameters (e.g., data compression, data encryption, etc.) are used.

However, when PDAs couple with host systems, the same

5 communication parameters are used for all transport mechanisms. Thus, whether a user is on a high bandwidth LAN or a lower bandwidth cellular link, the same amount of data is transferred regardless of the communication link used. This results in high connection costs for the user, as well as time consuming transfers. Similar problems are faced with other parameters: for  
10 instance, a user may need data encryption over a relatively unsecure link, such as wireless, but does not want that overhead when using a secure connection. Unfortunately, conventional systems either force the user to use data encryption at all times or not at all, depending on the particular system in place.

15 A further problem with this conventional method arises because PDAs generally have relatively low processing power. Therefore, a PDA may take a relatively long time to perform data compression/decompression processes or data encryption processes. Consequently, it is undesirable to force a PDA to send or receive data in these ways for all communication protocols.  
20 Unfortunately, the above conventional transfer methods may force a PDA to do just this.

Other conventional systems require a different server to handle each of the different transport mechanisms. Clearly, multiple servers add to the  
25 expense and complexity of the design, as a data stream must be routed

according to the transport mechanism. Furthermore, as multiple transport mechanisms may be used for a single logical connection, this conventional method faces challenges in routing the data stream to the correct server based on the type of transport mechanism. Additionally, a server may not exist to

5 handle the particular combination of transport mechanisms used.

## SUMMARY OF THE INVENTION

Therefore, it would be advantageous, then, to provide a method and system that provides a host system which adapts to the transport mechanism being used between a host computer system and a peripheral computer system and adjusts the communication parameters accordingly to optimize communication. What is further needed is a method and system that adapts when multiple transport mechanisms are used on a single communication link between the host and peripheral computer system. What is still further needed is a method and system that provides for a single host system that adapts communication protocol to any transport mechanism. What is further needed is a method that allows a PDA to send and receive data using an optimized communication protocol that does not require unnecessary PDA processor operations.

Accordingly, the present invention provides a method and system that adapts communication parameters to the transport mechanism being used when a host computer system and a peripheral computer system are synchronizing or otherwise exchanging data in order to communicate. Furthermore, the present method and system adapts when multiple transport mechanisms are being used on a single communication link. Additionally, the present method and system requires a single host computer system regardless of the transport mechanism which might be used. Furthermore, the present method and system does not require unnecessary PDA processor operations. The present invention provides these advantages and others not specifically mentioned above but described in the sections to follow.



A method and system for adapting communication protocol between a host computer system and a peripheral computer system depending on the transport infrastructure used, so that communication can be optimized and/or customized to the transport mechanism used is disclosed. A connection between the two computer systems is made. This connection is via one transport mechanism out of many possible transport mechanisms, such as a serial cradle, networked cradle, modem, cellular wireless, radio frequency, infrared, Internet, etc. The host computer system recognizes which transport mechanism is being used and determines the communication protocol based on the transport mechanism. For example, if the transport mechanism is low bandwidth wireless, the communication protocol may call for data encryption for security and data compression for economy. The communication protocol can be optimized for other parameters, such as authentication of the user attempting data transfer, and restriction on the data set to be transferred. The host system and peripheral computer then communicate using the determined protocol. In one embodiment, the parameters of the communication protocols may be updated by the user of the peripheral computer to affect only that user. In another embodiment, the parameters of communication protocols may be updated by a system administrator and affect all users of that system. In one embodiment, the parameters are adjusted depending upon the transport mechanism used by a host and peripheral system exchanging e-mail.

In another embodiment of the present invention, any number of transport mechanisms may be used on a single communication link between the host

computer system and the peripheral computer system. The present invention adapts to this multiple transport mechanism scenario and determines the best communication protocol for the given configuration.

5           In still another embodiment of the present invention, a personal digital assistant functions as the host computer system and recognizes which transport mechanism is being used and determines the communication protocol based on the transport mechanism.

10           In yet another embodiment of the present invention, both the host computer system and the peripheral device, e.g., a personal digital assistant each recognize which transport mechanism is being used and determine the communication protocol based on the transport mechanism.

## BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is system illustration of an exemplary PDA computer system connected to other computer systems and the Internet via a cradle device.

5            Figure 2A is a top side perspective view of an exemplary PDA computer system.

Figure 2B is a bottom side perspective view of the exemplary PDA computer system of Figure 2A.

10

Figure 3 is an exploded view of the components of the exemplary PDA computer system of Figure 2A.

15

Figure 4 is a perspective view of the cradle device for connecting the exemplary PDA computer system to other systems via a communication interface.

20

Figure 5 is a logical block diagram of the exemplary PDA computer system in accordance with an embodiment of the present invention.

Figure 6 is a front view of a exemplary PDA computer system illustrating the display screen, digitizer regions and an exemplary menu in accordance with the present invention.

Figure 7 is a block diagram of a peripheral computer system connecting to a desktop computer via a serial cradle, according to an embodiment of the present invention.

5           Figure 8 is a block diagram of a peripheral computer connecting to a Local Area Network via a network cradle, according to an embodiment of the present invention.

10           Figure 9 is a block diagram of a peripheral computer connecting to the Internet via a modem, according to an embodiment of the present invention.

15           Figure 10 is a block diagram of a peripheral computer connecting to the Internet while using an wireless Infrared transport mechanism, according to an embodiment of the present invention.

20           Figure 11 is a block diagram of a peripheral computer connecting to the Internet through a telecommunications provider reached via a Mobitex wireless transport mechanism, according to an embodiment of the present invention.

25           Figure 12 is a block diagram of a peripheral computer connecting to the Internet via a cellular phone reached via a personal area network radio frequency transport mechanism, according to an embodiment of the present invention.

Figure 13 is a conceptual diagram illustrating levels at which the communication protocols are set or may be altered, according to an embodiment of the present invention.

5            Figure 14 is a combination flowchart/data structure showing the steps of adapting communication parameters to the transport mechanism and showing a data structure which can be used for this process, according to an embodiment of the present invention.

10           Figure 15 is a flowchart showing the steps of adapting communication parameters to the transport mechanism, according to an e-mail embodiment of the present invention.

FIG. 13 is a conceptual diagram illustrating levels at which the communication protocols are set or may be altered, according to an embodiment of the present invention.

## DETAILED DESCRIPTION OF THE INVENTION

In the following detailed description of the present invention, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be obvious to one skilled in the art that the present invention may be practiced without these specific details. In other instances well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the present invention.

## NOTATION AND NOMENCLATURE

Some portions of the detailed descriptions which follow are presented in terms of procedures, steps, logic blocks, processing, and other symbolic representations of operations on data bits that can be performed on computer memory. These descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. A procedure, computer executed step, logic block, process, etc., is here, and generally, conceived to be a self-consistent sequence of steps or instructions leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated in a computer system. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussions, it is appreciated that throughout the present invention, discussions utilizing terms such as "processing" or "computing" or "translating" or "calculating" or "determining" or "scrolling" or "displaying" or "recognizing" or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

#### EXEMPLARY PERSONAL DIGITAL ASSISTANT PLATFORM

Figure 1 illustrates a system 50 that can be used in conjunction with various embodiments of the present invention. It is appreciated that the present invention can operate with a variety of host computer and peripheral computer platforms and that system 50 is merely exemplary. System 50 comprises a host computer system 56 which can be a desktop unit as shown or a laptop system 58. Optionally, one or more host computer systems can be used within system 50. Host computer systems 58 and 56 are shown connected to a communication bus 54, which in one embodiment can be a serial communication bus, but could be of any of a number of well known designs, e.g., a parallel bus, Ethernet Local Area

Network (LAN), etc. Optionally, bus 54 can provide communication with the Internet 52 using a number of well known protocols.

Importantly, bus 54 is also coupled to a cradle 60 for receiving and initiating  
5 communication with a peripheral computer system, e.g., a personal digital  
assistant (PDA) 100. The PDA 100 may be a palm top ("palm-sized") portable  
computer system, an intelligent cellular telephone, or the like. Cradle 60 provides  
an electrical and mechanical communication interface between bus 54 (and  
anything coupled to bus 54) and the computer system 100 for two way  
10 communications. Computer system 100 also contains a wireless infrared  
communication mechanism 64 for sending and receiving information from other  
devices.

Figure 2A is a perspective illustration of the top face 100a of one  
15 embodiment of the exemplary PDA computer system. The top face 110a contains  
a display screen 105 surrounded by a bezel or cover. A removable stylus 80 is  
also shown. The display screen 105 is a touch screen able to register contact  
between the screen and the tip of the stylus 80. The stylus 80 can be of any  
material to make contact with the screen 105. The top face 100a also contains  
20 one or more dedicated and/or programmable buttons 75 for selecting information  
and causing the computer system to implement functions. The on/off button 95 is  
also shown.

Figure 2A also illustrates a handwriting recognition pad or "digitizer"  
25 containing two regions 106a and 106b. Region 106a is for the drawing of



alphabetic characters therein (and not for numeric characters) for automatic recognition and region 106b is for the drawing of numeric characters therein (and not for alphabetic characters) for automatic recognition. The stylus 80 is used for stroking a character within one of the regions 106a and 106b. The stroke

5 information is then fed to an internal processor for automatic character recognition. Once characters are recognized, they are typically displayed on the screen 105 for verification and/or modification.

Figure 2B illustrates the bottom side 100b of one embodiment of the  
10 exemplary PDA computer system that can be used in accordance with various embodiments of the present invention. An optional extendible antenna 85 is shown and also a battery storage compartment door 90 is shown. A communication interface 108 is also shown. In one embodiment of the present invention, the serial communication interface 108 is a serial communication port,  
15 but could also alternatively be of any of a number of well known communication standards and protocols, e.g., parallel, SCSI, Firewire (IEEE 1394), Ethernet, etc.

Figure 3 is an exploded view of the exemplary PDA computer system 100 in accordance with one implementation. System 100 contains a front cover 210  
20 having an outline of region 106 and holes 75a for receiving buttons 75b. A flat panel display 105 (both liquid crystal display and touch screen) fits into front cover 210. Any of a number of display technologies can be used, e.g., LCD, FED, plasma, etc., for the flat panel display 105. A battery 215 provides electrical power. A contrast adjustment (potentiometer) 220 is also shown. On/off button 95  
25 is shown along with an infrared emitter and detector device 64. A flex circuit 230 is

shown along with a PC board 225 containing electronics and logic (e.g., memory, communication bus, processor, etc.) for implementing computer system functionality. The digitizer pad is also included in PC board 225. A mid-frame 235 is shown along with stylus 80. Position adjustable antenna 85 is shown.

5

A radio receiver/transmitter device 240 is also shown between the mid-frame and the rear cover 245 of Figure 3. The receiver/transmitter device 240 is coupled to the antenna 85 and also coupled to communicate with the PC board 225. In one implementation the Mobitex wireless communication system is used to provide two way communication between system 100 and other networked computers and/or the Internet via a proxy server.

10

Figure 4 is a perspective illustration of one embodiment of the cradle 60 for receiving the exemplary PDA computer system 100. Cradle 60 contains a mechanical and electrical interface 260 for interfacing with serial connection 108 (Figure 2B) of computer system 100 when system 100 is slid into the cradle 60 in an upright position. Once inserted, button 270 can be pressed to initiate two way communication between system 100 and other computer systems coupled to serial communication 265.

15

20

Figure 5 illustrates circuitry of computer system 100, some of which can be implemented on PC board 225. Computer system 100 includes an address/data bus 99 for communicating information, a central processor 101 coupled with the bus for processing information and instructions, a volatile memory 102 (e.g., random access memory RAM) coupled with the bus 99 for storing information and

25

instructions for the central processor 101 and a non-volatile memory 103 (e.g., read only memory ROM) coupled with the bus 99 for storing static information and instructions for the processor 101. Computer system 100 also includes an optional data storage device 104 (e.g., memory stick) coupled with the bus 99 for storing information and instructions. Device 104 can be removable. As described above, system 100 also contains a display device 105 coupled to the bus 99 for displaying information to the computer user. PC board 225 can contain the processor 101, the bus 99, the ROM 103 and the RAM 102.

Also included in computer system 100 of Figure 5 is an optional alphanumeric input device 106 which in one implementation is a handwriting recognition pad ("digitizer") having regions 106a and 106b (Figure 2A), for instance. Device 106 can communicate information and command selections to the central processor 101. System 100 also includes an optional cursor control or directing device 107 coupled to the bus 99 for communicating user input information and command selections to the central processor 101. In one implementation, device 107 is a touch screen device incorporated with screen 105. Device 107 is capable of registering a position on the screen 105 where the stylus makes contact. The display device 105 utilized with the computer system 100 may be a liquid crystal device, cathode ray tube (CRT), field emission device (FED, also called flat panel CRT) or other display device suitable for creating graphic images and alphanumeric characters recognizable to the user. In the preferred embodiment, display 105 is a flat panel display.

Signal communication device 108, also coupled to bus 99, can be a serial port for communicating with the cradle 60. Device 108 can also include an infrared communication port.

Figure 6 is a front view of the exemplary PDA computer system 100 with a menu bar 305 open displaying a pull down window. Also shown are two regions of digitizer 106a and 106b. Region 106a is for receiving user stroke data for alphabet characters, and typically not numeric characters, and region 106b is for receiving user stroke data for numeric data, and typically not for alphabetic characters. Physical buttons 75 are also shown. Although different regions are shown for alphabetic and numeric characters, the present invention is also operable within a single region that recognizes both alphabetic and numeric characters.

## METHOD AND SYSTEM FOR ADAPTIVE DATA SYNCHRONIZATION AND TRANSPORT ACROSS MULTIPLE DATA TRANSPORT INFRASTRUCTURES

The present invention provides for a method and a system that optimize data transfers between a host computer system and a peripheral computer system, such as a PDA, depending on the transport mechanism used. The host computer system may be any source of information, e.g., a desktop, a server, a web-based server, a LAN, etc. Figures 7 - 12 illustrate systems connected with possible transport mechanisms. The present invention determines what transport mechanism or mechanisms are being used and transfers data using communication protocols which are optimized for the given transport

mechanism(s). The communication protocols are made up of parameters including, but not limited to: data compression, data encryption, communication rate, maximum character length allowed to be transmitted, user authentication, and data set limitation.

5

Figure 7 illustrates an exemplary system 1510 having a PDA 100 coupled to a host system 56. In system 1520, a PDA 100 is connected to a serial cradle 60, which in turn is connected via serial communication bus 54 to a desktop computer system 56 (the host system). (The PDA 100 is inserted into the serial cradle 60, see Figure 4.) Thus, the communication link is established via the transport mechanism of a serial cradle device. In this embodiment, adaptation software 702, which determines the transport mechanism being used, resides on the desktop computer system 56. Because the serial communication bus 54 is relatively fast and secure, it is not necessary to use data encryption or data compression, and it is possibly not necessary to use password protection. Furthermore, using data compression may slow down the transfer because the PDA is forced to run a compression or decompression algorithm, and PDAs generally have relatively low processor power.

20 In other embodiments, the adaptation software 702 may reside on the server 704, the LAN 706, or on an Internet 52 based server (not shown). In these embodiments, information regarding the transport mechanism used by the PDA 100 is passed through the desktop 56 and on to the other computer system, which then determines the appropriate communication protocol. It will be understood that the adaptation software 702 may reside in whatever location

is suitable to determine the necessary communication protocol between PDA 100 and the host system 56. Furthermore, the adaptation software 702 may be a part of another program such as an e-mail server program or a synchronization program.

5

In another embodiment of the present invention, adaptation software 702 resides on the PDA 100. In this fashion, the PDA 100 may recognize the transport mechanism being used and determine the appropriate communication protocol. In still another embodiment, both the PDA 100 and the host 56 have  
10 adaptation software 702. Thus, they adapt to the transport mechanism together.

Figure 8 illustrates a system 1520 having a PDA 100 connected to a LAN 706 via a network cradle 802. The transport mechanism 804 may be wired or wireless, such as 802.11 wireless LAN. In this embodiment, the host system  
15 704 is coupled to the LAN 706 and the adaptation software 702 resides on the LAN and is able to determine the transport mechanism being used and determines the communication protocol accordingly. The LAN 706 may connect to another server 704 or the Internet 52. A wide area network (WAN) 806 is also connected to the network cradle 802. While both the LAN and the  
20 WAN may provide for wireless transmissions, the WAN may have lower speed and be less reliable than the LAN. Consequently, the adaptation software 702 on the LAN will handle the transfer somewhat differently than the adaptation software 702 on the WAN 806. For example, when using the WAN to retrieve pricing or e-mail information, the PDA 100 may only receive high priority

information. The user may connect the PDA 100 to the LAN 706 to receive full pricing information.

Figure 9 illustrates a system 1530 in which a PDA 100 is connected to a host server 704 via a modem 902. The host server 704, is used to provide access to the Internet 52. The transport mechanism is based on modem 902. In this embodiment, the adaptation software 702 resides on the server 704. However, the adaptation software may also reside on the LAN 706. In this embodiment, if the modem is relatively slow, the adaptation software 702 may use data compression to reduce data volume and hence speed up data transfers. Furthermore, security issues may require use of encryption when a PDA user contacts a corporate server in this fashion. Additionally, user authentication presents different concerns when connecting to a corporate server than when connecting to a desktop. Consequently, this will be factored into the communication protocol.

Figure 10 illustrates a system 1540 in which a PDA 100 is connected to a host server 704, which is illustrated as part of the Internet 52. In this embodiment, the adaptation software 702 resides on the host server 704. The adaptation software 702 may reside on the LAN 706, as well. The transport mechanism includes the Internet in this case. Because, the adaptation software 702 determines that an Infrared transport mechanism is being used, all data transfers are performed with data compression for efficiency in this embodiment. In another embodiment, a limited data set is transferred. For example, when a user is downloading e-mail, attachments may not be sent, or only e-mail flagged

as urgent or of a high priority will be sent. The user may download these attachments at a later time, for example when connected to a desktop computer 56 through a serial cradle 60. When downloaded, the attachments will be automatically associated with their respective e-mail messages.

5

Figure 11 illustrates a system 1550 including a PDA 100 connecting to the Internet 52 by first connecting to a telecommunications provider 1102 via Mobitex wireless communication system, for instance. The telecommunications provider 1102 then provides for the Internet 52 connection through a proxy server 704. The transport mechanism therefore includes a wireless link. When using wireless transport mechanisms, security becomes a larger concern. Therefore, the transmission may be encrypted. Furthermore, cost of the transmission is a key factor with respect to the wireless communication provider, e.g., Mobitex. Consequently, data compression may be used here to speed up the transmission.

10

15

Figure 12 illustrates a system 1560 including a PDA 100 connecting to a cellular phone 1202 via a personal area network radio frequency transport mechanism. The cellular phone 1202 then connects to the server 704. A wide area network (WAN) 1206 is also illustrated in Figure 12. While WANs cover large regions, they are somewhat slower and sometimes less reliable than local area networks. Therefore, these factors will be used to determine the communication protocol if that path is taken. Furthermore, there are several transport mechanisms being used when the PDA 100 connects with the Internet 52 in this example. In one embodiment of the present invention, the adaptation

20

25



software 702 takes all transport mechanisms into consideration when determining the communication protocol.

The communication protocols are established in a variety of ways,  
5 according to the present invention, depending on the transport mechanism used to link the PDA 100 and the host computer system. Figure 13 shows a conceptual illustration of various levels in which the communication protocols may be established or altered. At the bottom are the system level parameters. Communication protocols at this level are non-alterable. That is to say, they are  
10 set in the adaptation software 702 and are based upon a scheme which optimizes data transfers on the given transport mechanism. It will be clear to those of ordinary skill in the art that the communication protocols in the adaptation software 702 may be different in different embodiments of the present invention. For example, a mail server program may have different  
15 communication protocols than a synchronization program. Additionally, a single program may have different communication protocols depending on the data being transferred. For example, a synchronization program may use a different protocol when downloading software than when synchronizing a calendar program. These types of communication protocols are set by the  
20 system level parameters.

Still referring to Figure 13, above the system layer, conceptually, are the system administrator layer 1304 parameters. In one embodiment of the present invention, the communication protocols may be altered by a system  
25 administrator with the changes affecting all users of the system. For example,

the system administrator may be concerned with bandwidth use and hence may limit data transfers to a given size. This may be implemented to save a company money or simply to make the user's experience acceptable. In one embodiment, an administrator parameter program resides on the host computer

5 56 to allow the administrator to update the parameters.

Still referring to Figure 13, the user level 1306 parameters are at the highest level conceptually. At this level, the user may customize the communication protocols for this user alone. In one embodiment, this is

10 implemented by the user displaying a user preference screen 1310 containing the various transport mechanisms (RF, IR, serial cradle, etc.) and various communication protocols (data compression, data set limitation, etc.) to be used with the given transport mechanism. In this fashion, the user may set more stringent requirements than are required by a lower level, and the user may

15 customize the communication protocols to his/her own preferences based on the possible transport mechanisms that can be used by the user. For example, the user may not wish e-mail attachments to be sent even though it is allowed for the given transport mechanism. However, the user is not allowed to sidestep protocols set at a lower level, for example a limit on the size of data transfers

20 when using a wireless connection will control if made at the system or administrator level. In one embodiment, a user parameter program resides on the PDA 100 to allow the user to update the parameters.

Figure 14 illustrates the steps of the process of adapting the communication protocol to the transport mechanism being used, according to

25

one embodiment of the present invention. Figure 14 also shows data structures which may be used in this process. In step 1405, a peripheral computer system creates a connection with a host computer system. This connection occurs over one of many possible alternative transport mechanisms, such as IR, RF, serial  
5 cradle, network cradle, etc. Box 1450 illustrates that the type of transport mechanism is identified and is passed on to the host computer system 56 (or server 704, LAN 706, etc.).

Box 1460 illustrates a data structure which is used in one embodiment to  
10 determine the communication protocol for each transport mechanism. A given column contains the communication protocol for one transport mechanism (RF, IR, Internet, Modem, etc.) Only a few of the columns are shown in box 1460. Each cell contains a value which defines the communication parameter. For example, the value in cell 1465 defines what data encryption is to be used  
15 when the transport mechanism is radio frequency. The values in box 1460 may be established by a host e-mail program, or another program. In this fashion, the e-mail or other program may transfer messages encrypted when RF or any wireless transport mechanism is used and not compressed when a serial cable is used by the PDA 100. With knowledge of the transport mechanism passed to  
20 it, the host system 56 determines, in step 1410, the communication protocol to use for optimizing or customizing data transfers between the host system 56 and the peripheral computer system 100.

In step 1415, the host system 56 refines the parameters based upon the  
25 administrator and user set preferences. In one embodiment, a table such as the

one illustrated in box 1470 may be used for this purpose. For example, cell 1475 contains a value for data encryption to be used when the transport mechanism is RF, per the system administrator's preference. If the e-mail program which set the value in cell 1465 did not call for encryption, the system administrator concerned with security could do so. Cell 1485 contains a value set by the user for the encryption to be used when the transport mechanism is RF. Thus, the present invention is flexible in allowing the parameters to be set at various levels. Those of ordinary skill in the art will understand that various algorithms are possible to decide which value of the three (host system, administrator, user) will be chosen when conflicts exist. Furthermore, it will be clear that limitations may be placed on the preferences set by the system administrator, and especially the user.

In step 1420, data is transferred between the host 56 and the peripheral computer system 100 using the determined protocol from step 1420 and modified by step 1415. This transfer may be accomplished with communication software residing on said host computer system.

Figure 15 illustrates a flowchart 1600 of an e-mail embodiment of the present invention. In step 1610, a PDA 100 accesses a host computer system or host server to exchange e-mail. The PDA establishes the communication link via one of a number of transport mechanisms. In step 1620, the host system 56 identifies the transport mechanism used by the PDA.

In step 1630, the host optimizes the communication of e-mail messages based upon the transport mechanism used. For example, if the transport mechanism is wireless, time and cost factors may limit the messages in number, size, and urgency. Also, attachments may not be sent, and a highly  
5 compressed scheme may be used. Additionally, a system administrator concerned with security could select the encryption protocol, as well as the authentication protocol.

In step 1630, e-mail messages are communicated in both directions  
10 between the host system 56 and the PDA 100. In step 1650, the process continues until all messages are transferred. A user of a PDA 100 is free to change the communication parameters at any time. Thus, a sensitive message could be sent encrypted, while the rest are not. If there are messages or portions thereof which were withheld from transfer, the user may retrieve them  
15 by accessing the host 56 via a transfer mechanism for which transfer of those messages is allowed.

The preferred embodiment of the present invention, a method and system for adapting to the transport mechanism being used between a host  
20 computer system and a peripheral computer system and adjusting the communication parameters accordingly, is thus described. While the present invention has been described in particular embodiments, it should be appreciated that the present invention should not be construed as limited by such embodiments, but rather construed according to the below claims.

## CLAIMS

What is claimed is:

5           1.     A method of communicating with a peripheral computer system comprising the steps of:

          a) said peripheral computer system creating a communication link with a host computer system using one transport mechanism of a plurality of possible transport mechanisms;

10           b) said host computer system recognizing said one transport mechanism used in step a);

          c) said host computer system determining a communication protocol from a plurality of possible communication protocols based on said one transport mechanism used in step a); and

15           d) said host computer system communicating information to said peripheral computer system based on said communication protocol determined at step c).

          2.     A method as described in Claim 1 wherein said plurality of  
20 transport mechanisms comprises: communication via a serial line coupled to said host computer; communication via a networked line coupled to said host computer using a network; communication via a wireless link to said host computer; and communication via the Internet.

3. A method as described in Claim 1 wherein said communication protocol determined at step c) restricts data volume communicated to said peripheral computer system.

5 4. A method as described in Claim 1 wherein said communication protocol determined at step c) selects a particular user authentication protocol performed to establish data communication between said peripheral computer system and said host computer system.

10 5. A method as described in Claim 1 wherein said communication protocol determined at step c) selects a particular data encryption protocol performed to establish data communication between said peripheral computer system and host computer system.

15 6. A method as described in Claim 1 wherein said communication protocol determined at step c) selects a particular data set that can be accessed by said peripheral computer system.

20 7. A method as described in Claim 1 wherein said peripheral computer system is a personal digital assistant (PDA).

8. A method as described in Claim 1 and further comprising the step of e) updating said plurality of communication protocols wherein said step e) comprises the steps of:

e1) allowing a first set of said plurality of communication protocols to be updated by a system administrator, said first set applied to all users; and

e2) allowing a second set of said plurality of communication protocols to be updated by a given user, said second set applicable only to said given user.

5

9. A system for communicating with a peripheral computer system comprising:

a) a host computer system;

b) a peripheral computer system;

10 c) a communication link between said host computer system and said peripheral computer system, said communication link being made on one transport mechanism of a plurality of transport mechanisms;

d) said host computer system operable to recognize said transport mechanism of a plurality of transport mechanisms;

15 e) said host computer system also operable to determine a communication protocol from a plurality of communication protocols based on said transport mechanism used; and

f) said host computer system also operable to communicate information to said peripheral computer system based on said communication protocol  
20 determined in paragraph e).

10. The system of Claim 9 wherein:

g) said peripheral computer system operable to recognize said transport mechanism of said plurality of transport mechanisms;



h) said peripheral computer system also operable to determine said communication protocol from said plurality of communication protocols based on said transport mechanism used; and

i) said peripheral computer system also operable to communicate  
5 information to said host computer system based on said communication protocol determined in paragraph h).

11. The system of Claim 9 wherein said plurality of transport mechanisms comprises: communication via a serial line coupled to said host  
10 computer; communication via a networked line coupled to said host computer using a network; communication via a wireless link to said host computer; and communication via the Internet.

12. The system of Claim 9 further comprising: a user interface coupled  
15 to said peripheral computer system, said user interface operable for allowing a user to update a set of said plurality of communication protocols, said set applicable only to said user.

13. The system of Claim 9 further comprising: a system administrator  
20 interface coupled to said host system, said system administrator interface operable for allowing a system administrator to update a set of said plurality of communication protocols, said set applicable to all users.

14. The system of Claim 9 wherein said communication protocol  
25 restricts data volume communicated to said peripheral computer system.

15. The system of Claim 9 wherein said communication protocol selects a particular user authentication protocol performed to establish data communication between said peripheral computer system and said host  
5 computer system.

16. The system of Claim 9 wherein said communication protocol selects a particular data encryption protocol to be used for data communication between said peripheral computer system and host computer system.

10

17. The system of Claim 9 wherein said communication protocol selects a particular data set that can be accessed by said peripheral computer system.

15

18. The system of Claim 9 wherein said peripheral computer system is a personal digital assistant (PDA).

19. An apparatus for transferring information on a host computer system and a personal digital assistant, said apparatus comprising:  
20 a communication link, said communication link connecting said host computer system to said peripheral computer system;

said communication link being made on one transport mechanism of a plurality of transport mechanisms;

architecture on said host computer system, said architecture for determining said one transport mechanism of a plurality of transport mechanisms;

adaptation software residing on said host computer system, said

- 5 adaptation software operable to determine a communication protocol from a plurality of communication protocols based on said one transport mechanism;

communication software residing on said host computer system, said communication software operable to transfer data between said host computer system and said peripheral computer system based on said communication

- 10 protocol determined by said adaptation software.

20. The apparatus of Claim 19 further comprising: a user parameter program residing on said peripheral computer system, said user parameter program operable to allow a set of said plurality of communication protocols to be updated by a given user, said set applicable only to said given user.

- 15

21. The apparatus of Claim 19 further comprising: an administrator parameter program residing on said host computer system, said user administrator parameter program operable to allow a set of said plurality of communication protocols to be updated by a system administrator, said set applicable to all users in a system.

- 20

## ABSTRACT OF THE INVENTION

A method and system for adapting communication protocol between a host computer system and a peripheral computer system depending on the transport infrastructure used, so that communication can be optimized and/or customized to the transport mechanism used. A connection between the two computer systems is made. This connection is via one transport mechanism out of many possible transport mechanisms, such as a serial cradle, networked cradle, modem, cellular wireless, radio frequency, infrared, Internet, etc. The host computer system recognizes which transport mechanism is being used and determines the communication protocol based on the transport mechanism. For example, if the transport mechanism is low bandwidth wireless, the communication protocol may call for data encryption for security and data compression for economy. The communication protocol can be optimized for other parameters, such as authentication of the user attempting data transfer, and restriction on the data set to be transferred. The host system and peripheral computer then communicate using the determined protocol. In one embodiment, the parameters of the communication protocols may be updated by the user of the peripheral computer to affect only that user. In another embodiment, the parameters of communication protocols may be updated by a system administrator and affect all users of that system.

50

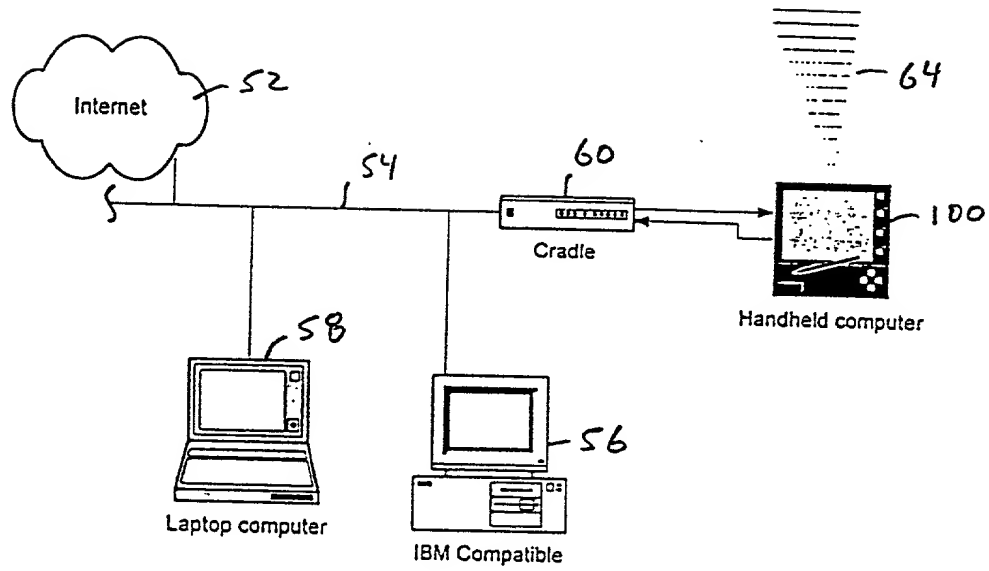


FIG. 1

FIG. 2A is a perspective view of a portable electronic device 100a in an open position. The device 100a includes a display 105, a keypad 75, and a speaker 80. The keypad 75 includes a numeric keypad 106a and a function keypad 106b. The device 100a is shown in a perspective view, with the display 105 and keypad 75 visible. The device 100a is shown in a perspective view, with the display 105 and keypad 75 visible.

100a

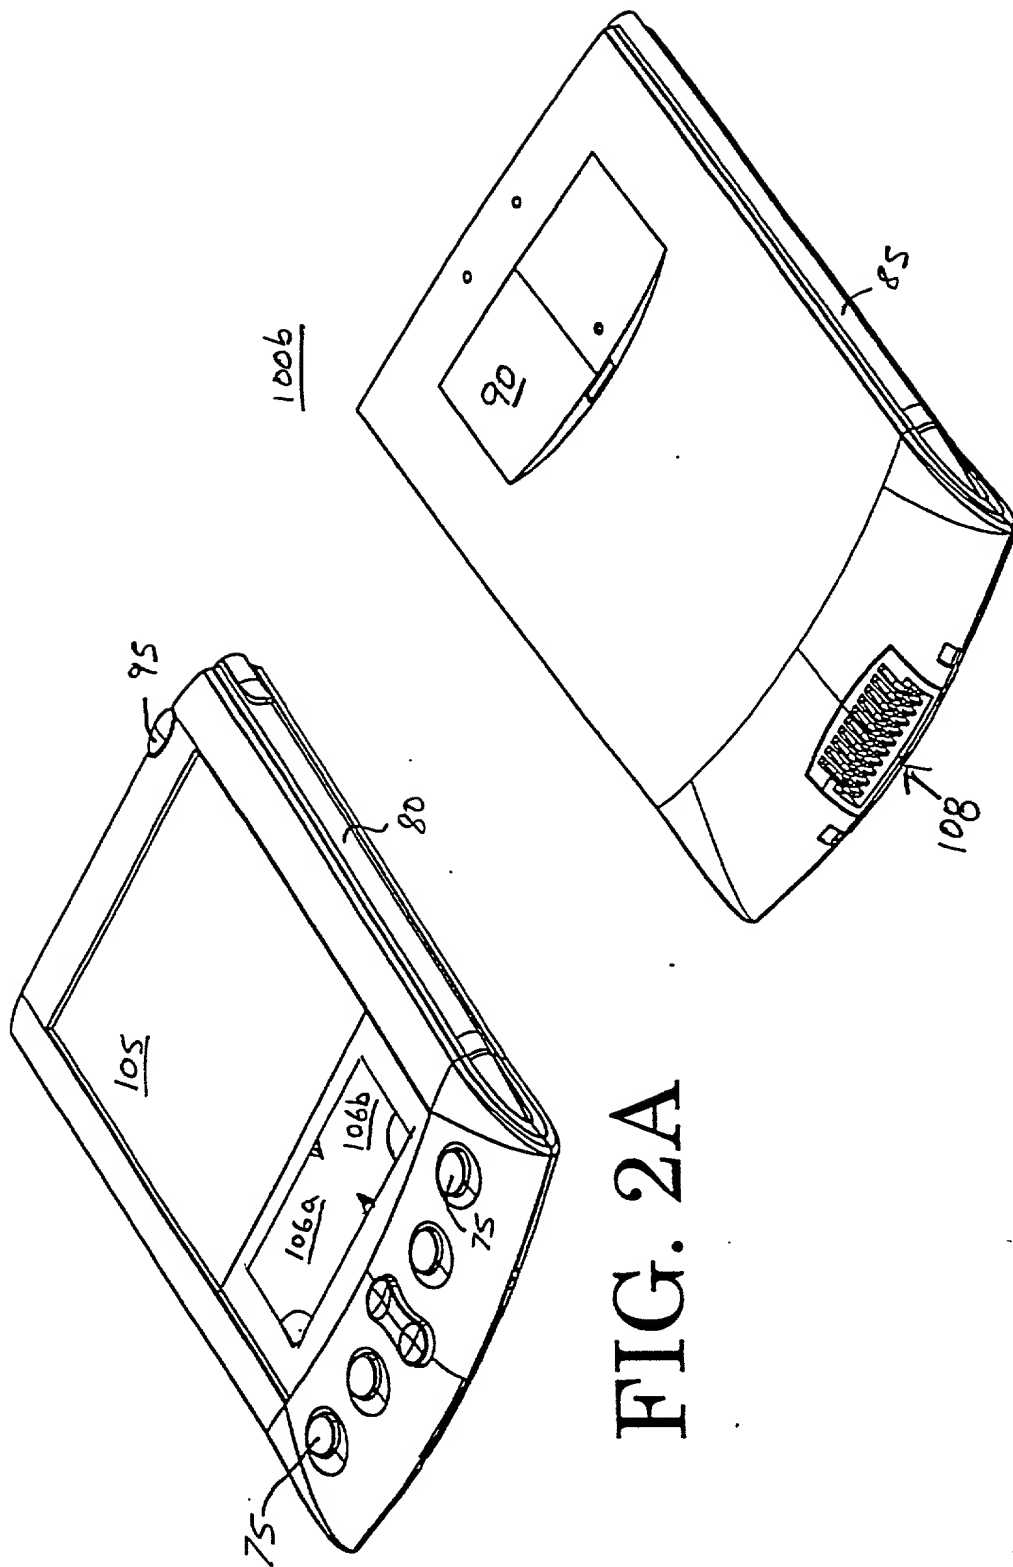


FIG. 2A

FIG. 2B

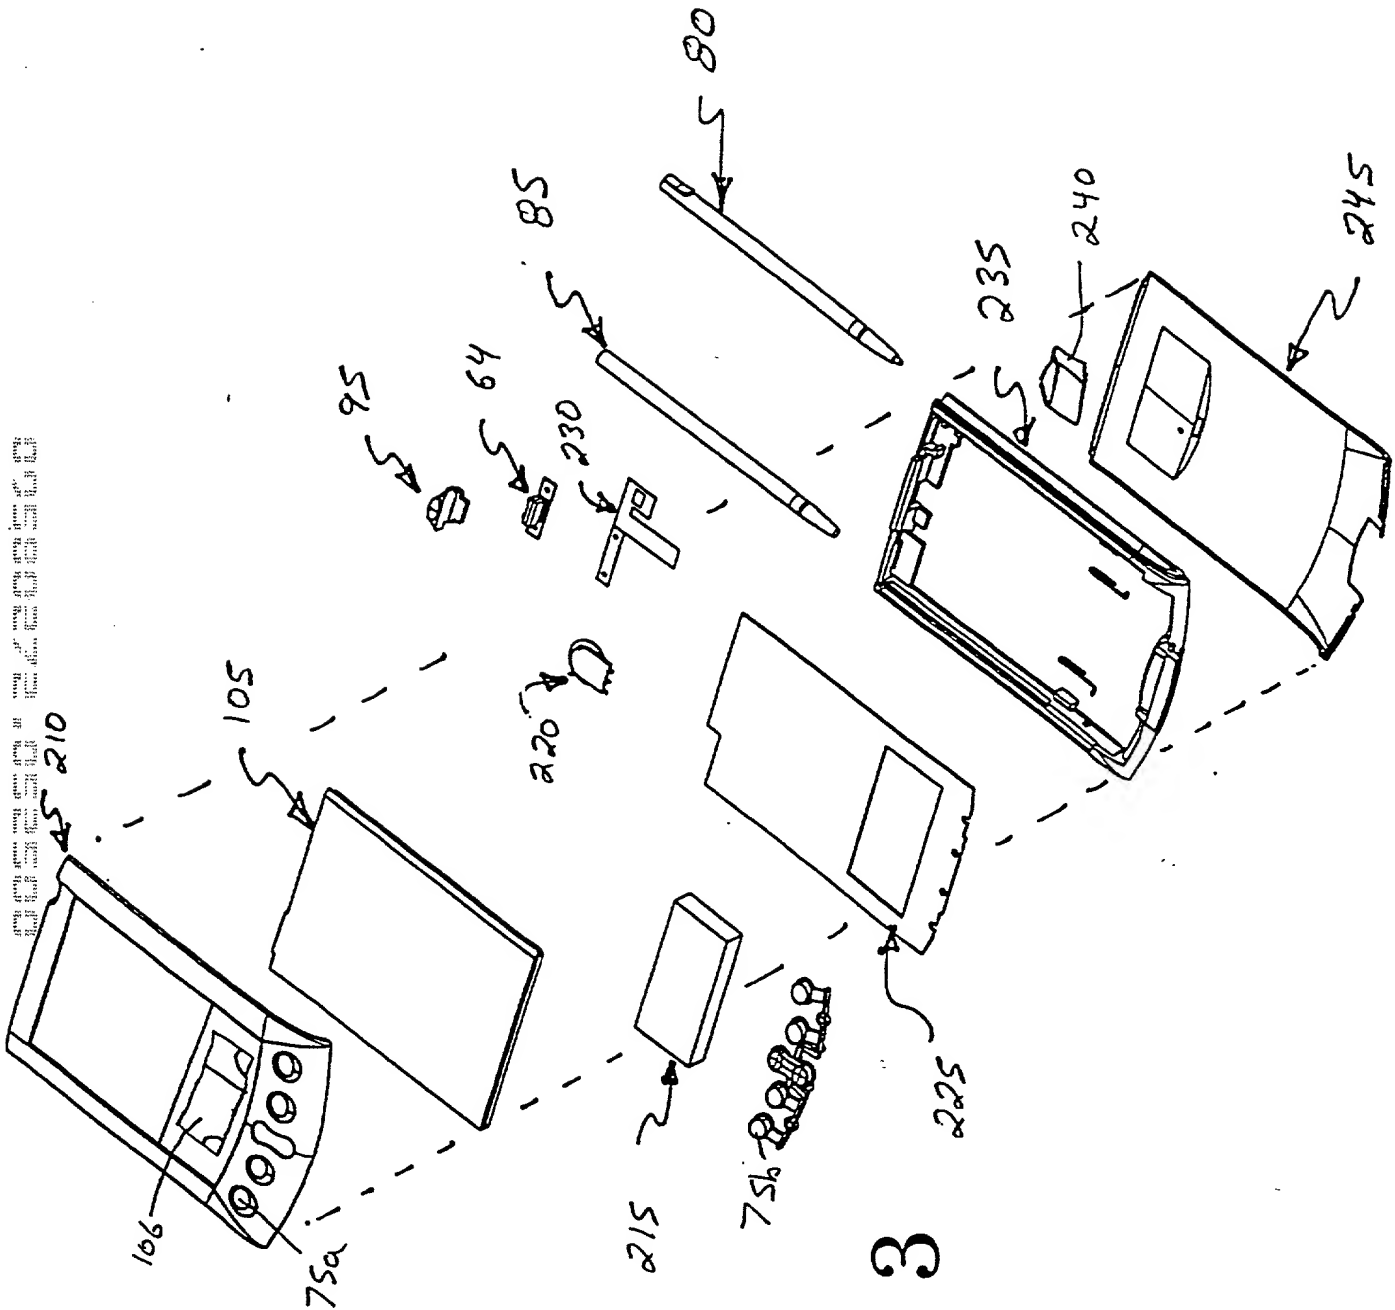


FIG. 3

FIG. 4 is a perspective view of the device 60 in an open position. The device 60 includes a base 260 and a cover 265. The base 260 has a front edge 270. The cover 265 is hinged to the base 260. The device 60 is shown in an open position, with the cover 265 tilted upwards. The base 260 has a front edge 270. The cover 265 is hinged to the base 260. The device 60 is shown in an open position, with the cover 265 tilted upwards.

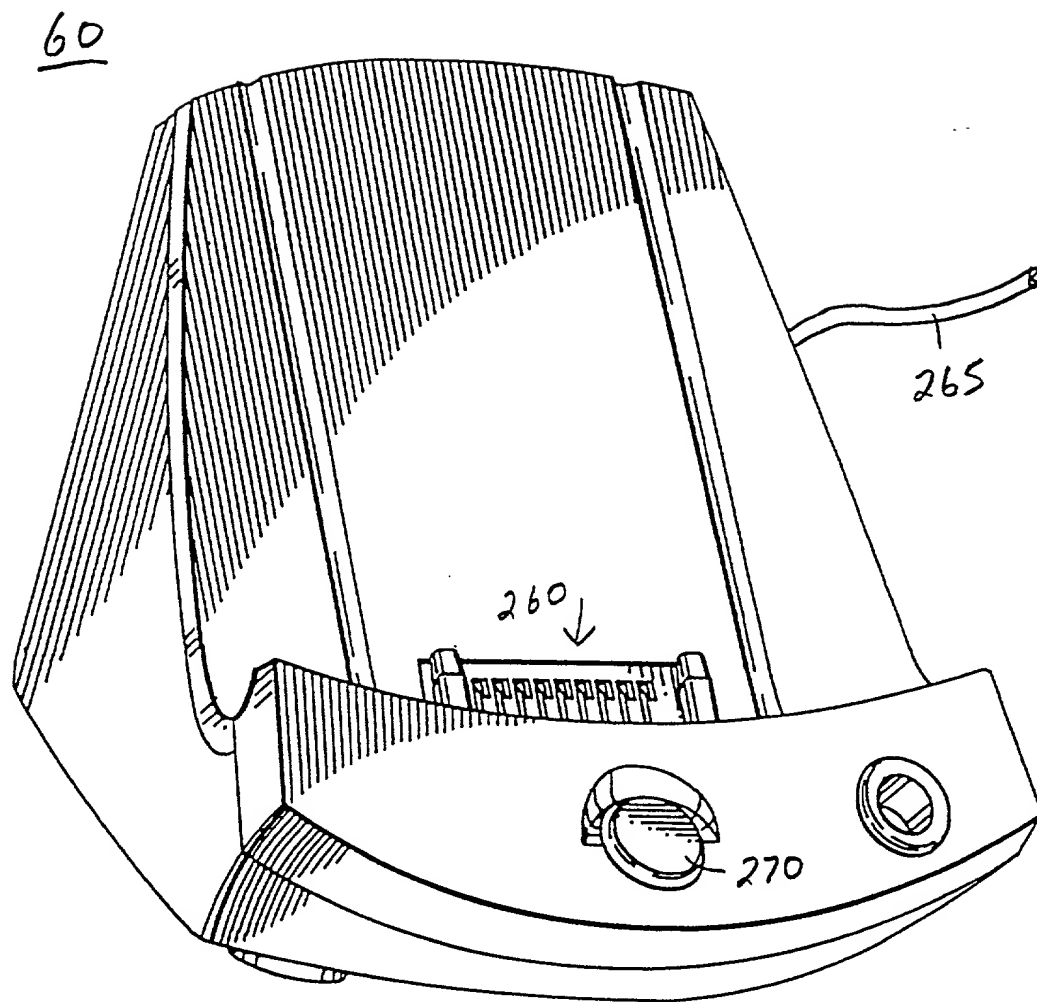


FIG. 4



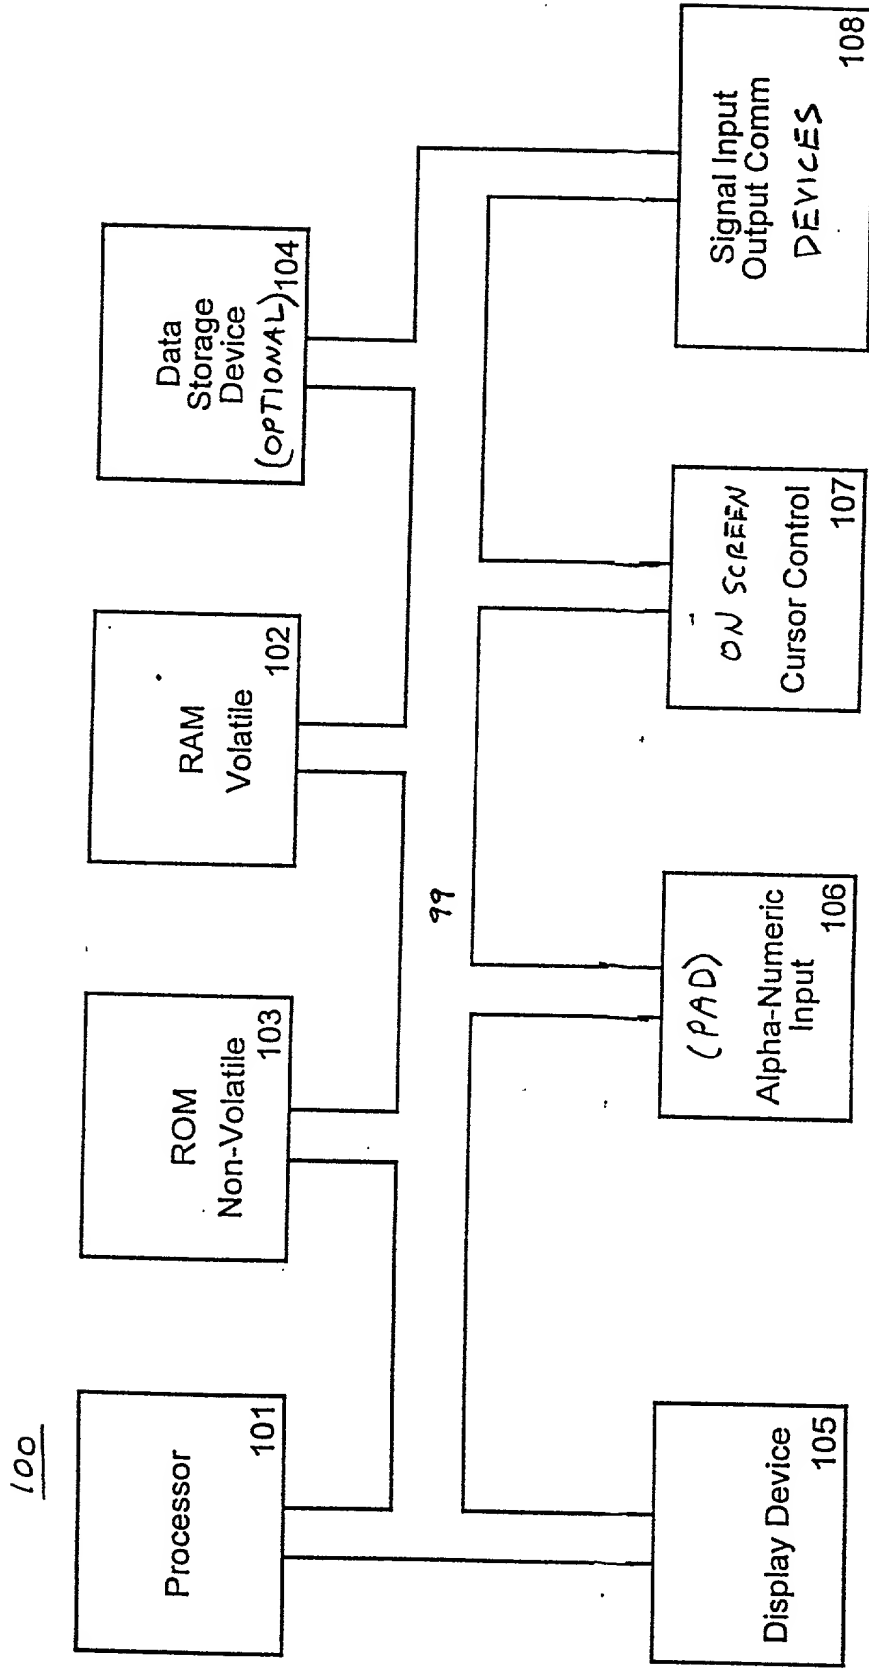


FIG. 5

100

305

106a

106b

75

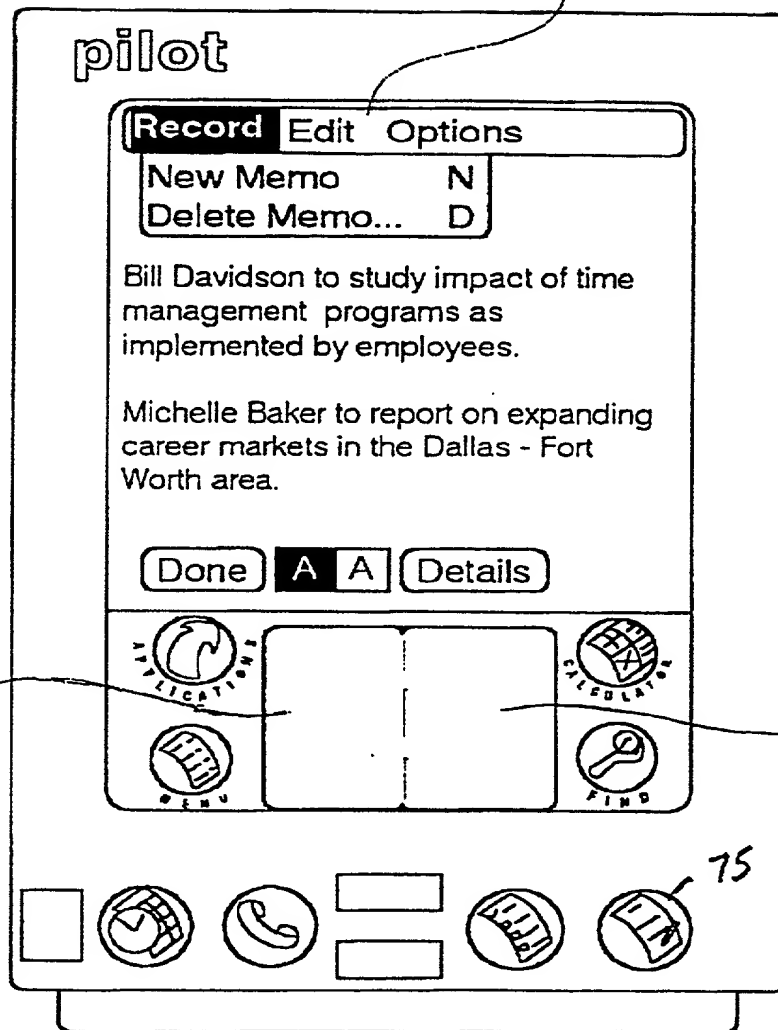


FIG. 6

1510

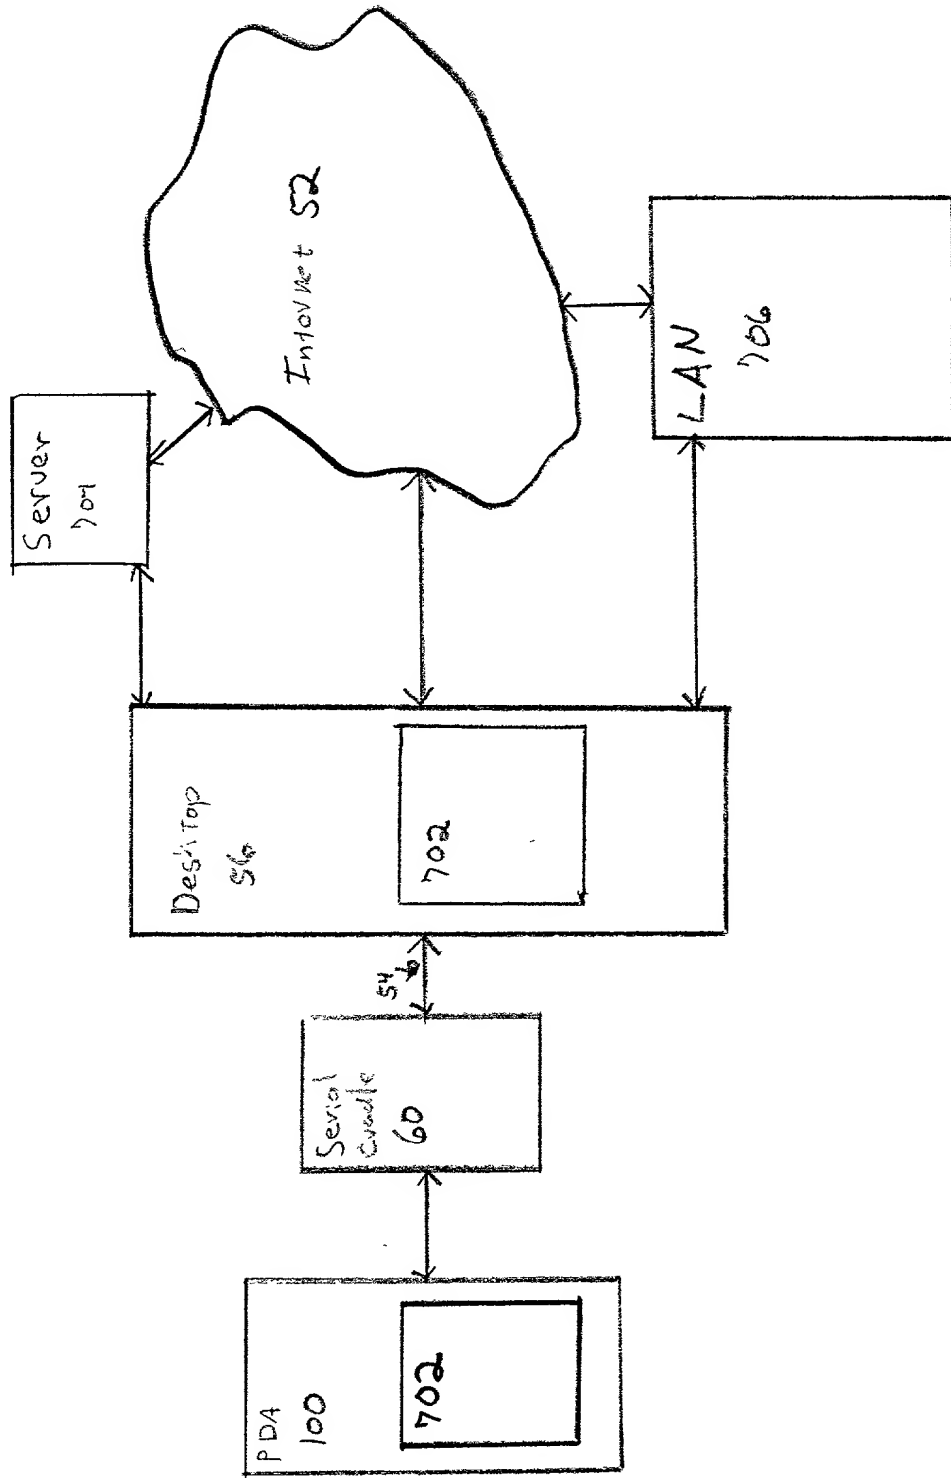


Figure 7

1520

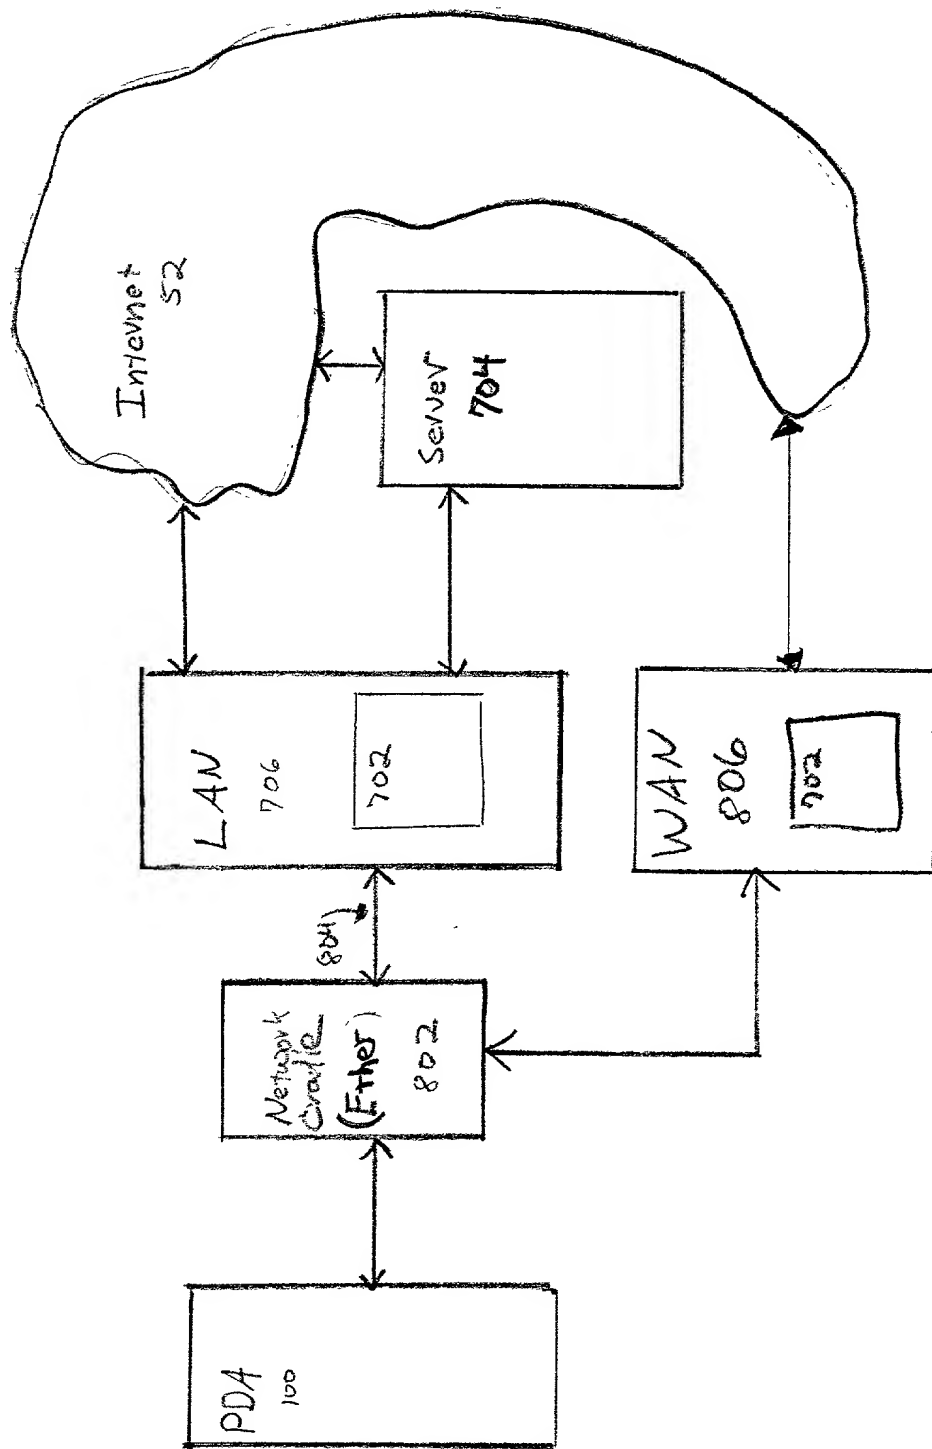


Fig. 8



1530

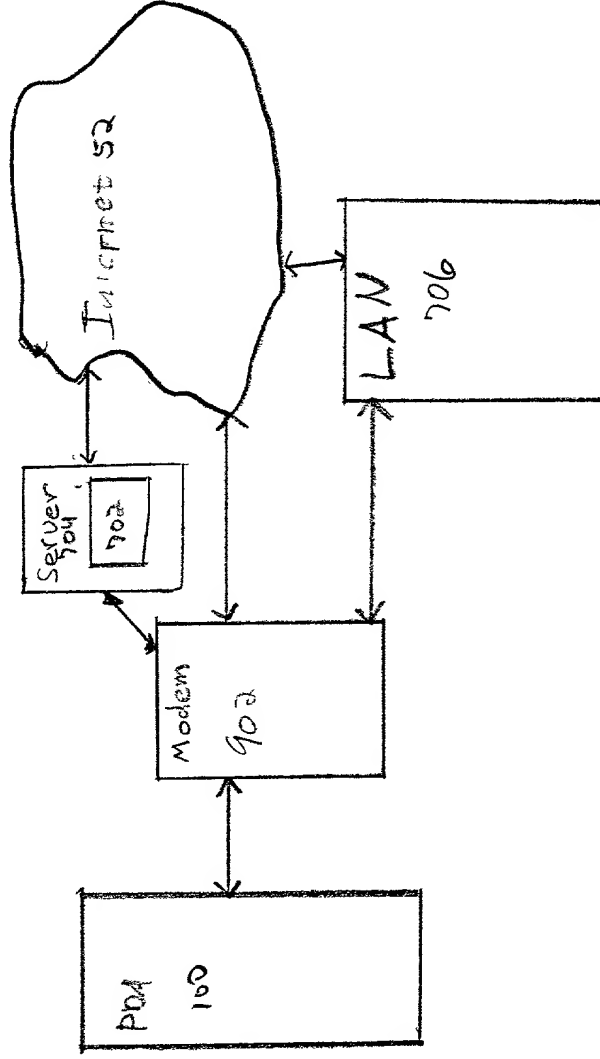


Figure 9



THESE PAGES ARE NOT TO BE USED FOR ANY OTHER PURPOSE THAN THAT FOR WHICH THEY WERE DESIGNED.

1540

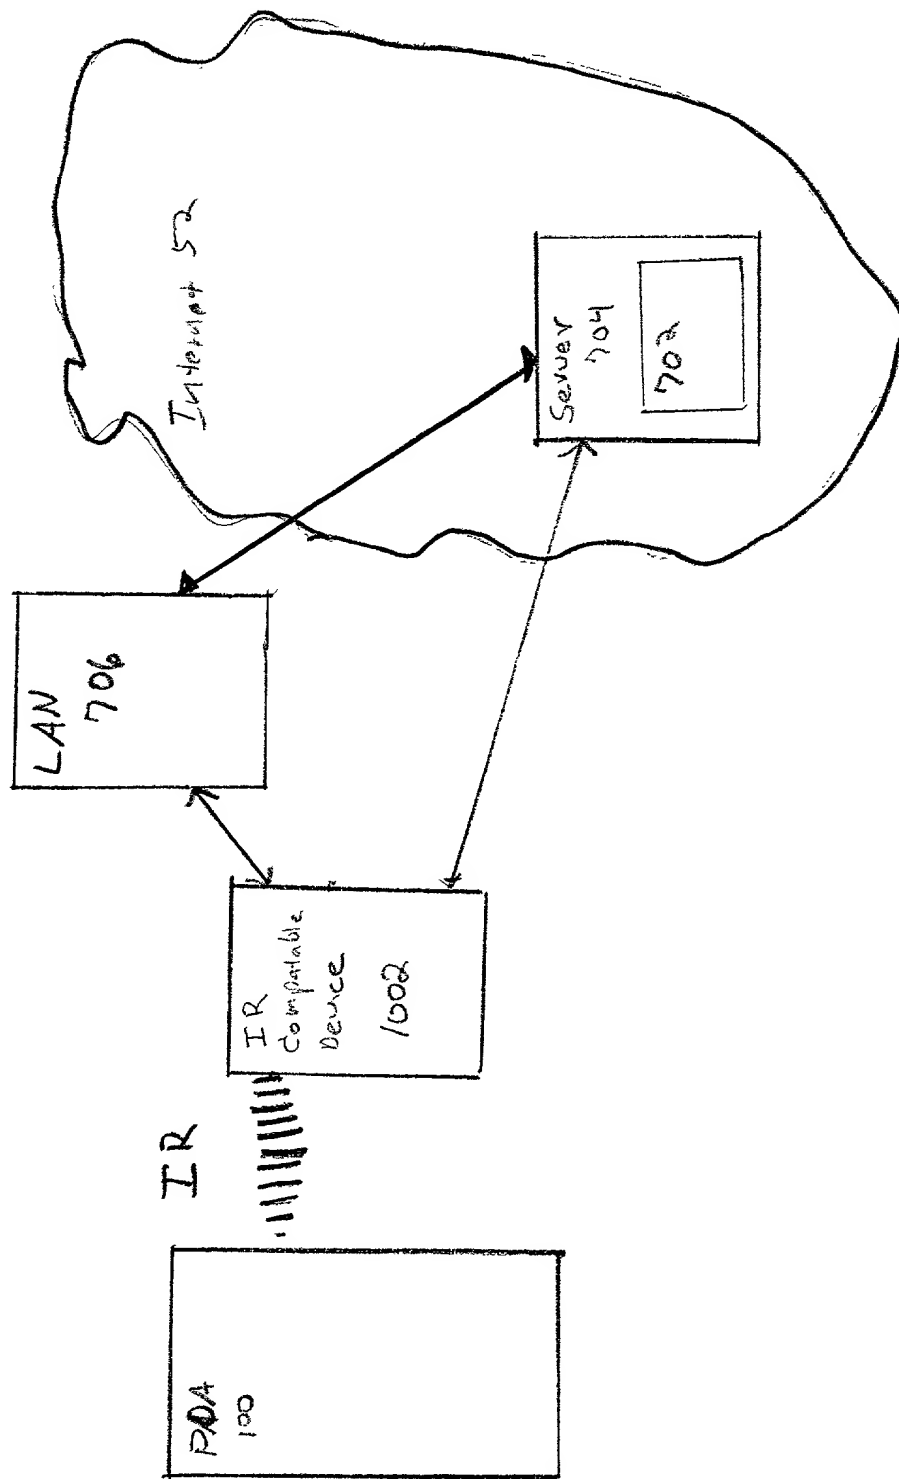


Figure 10

THE ALVIN ENGINEERING COMPUTATION PAD IS A REGISTERED TRADEMARK OF ALVIN ENGINEERING, INC. ALL RIGHTS RESERVED.

1550

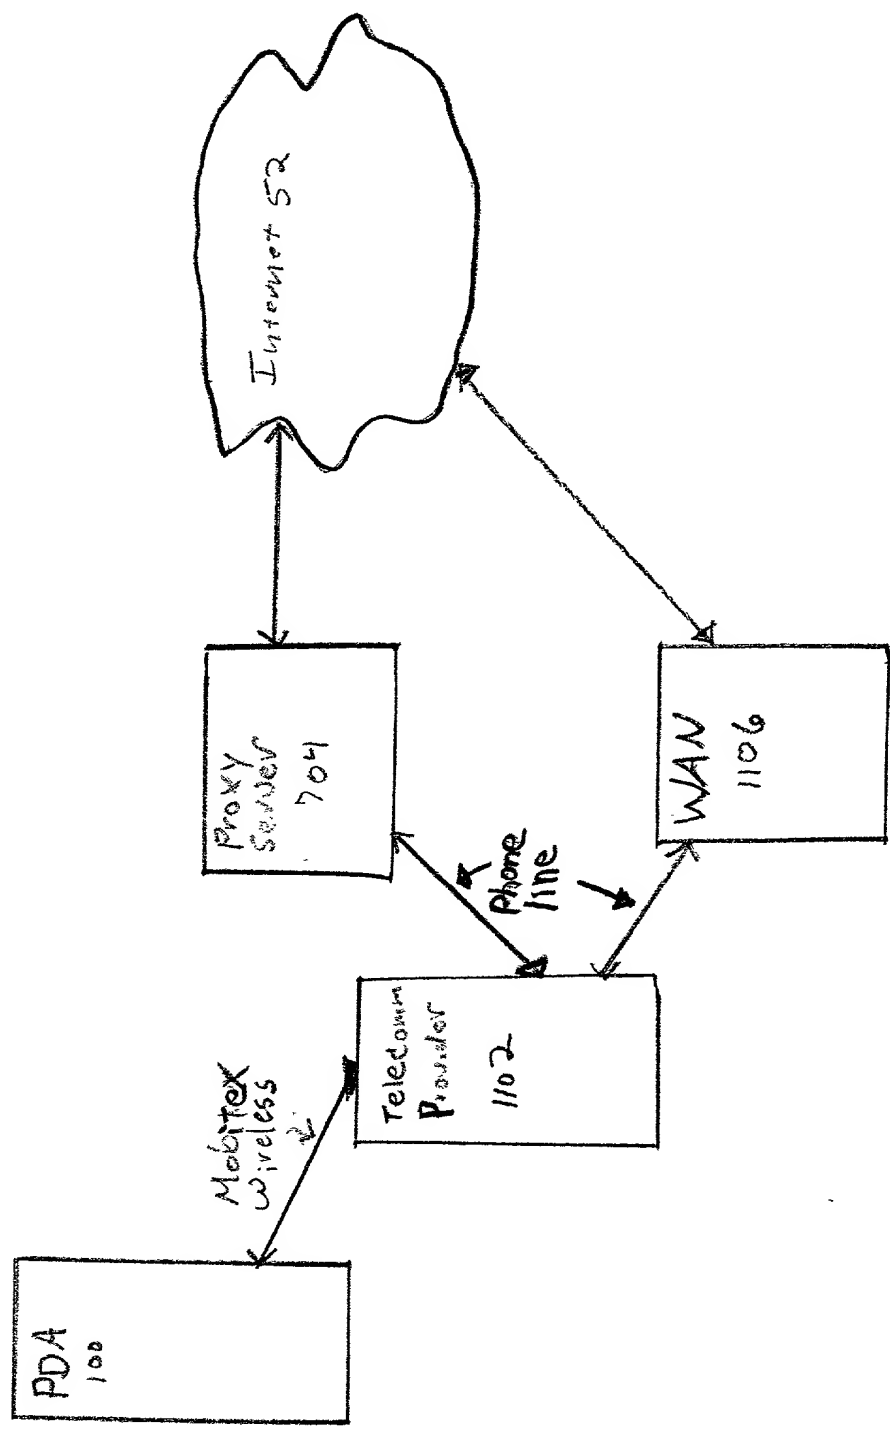


Figure 11

1560

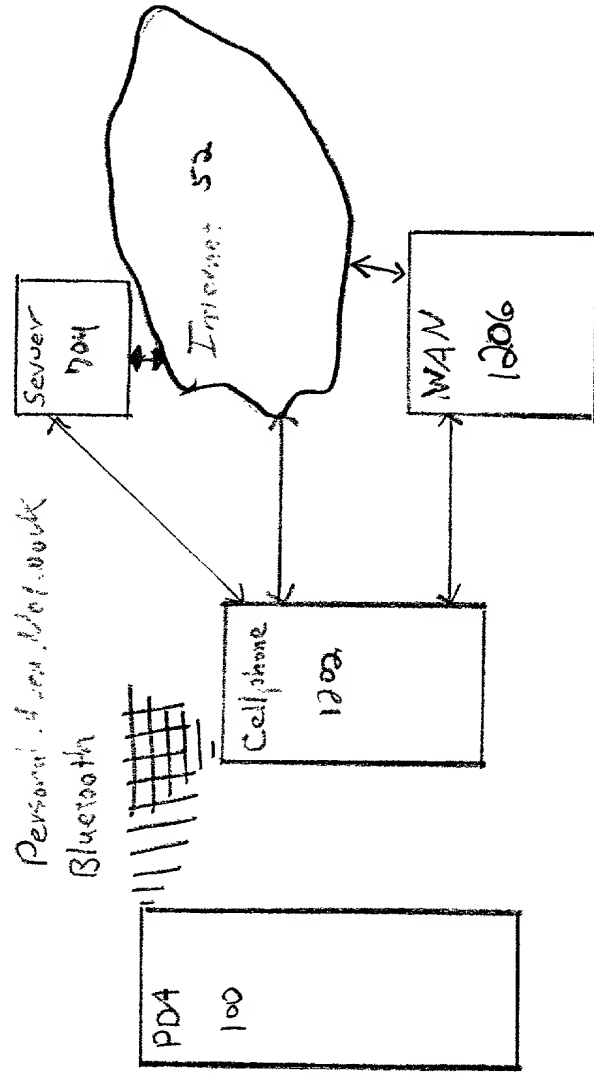


Figure 12



Handwritten text at the top of the page, possibly a header or page number, oriented vertically.

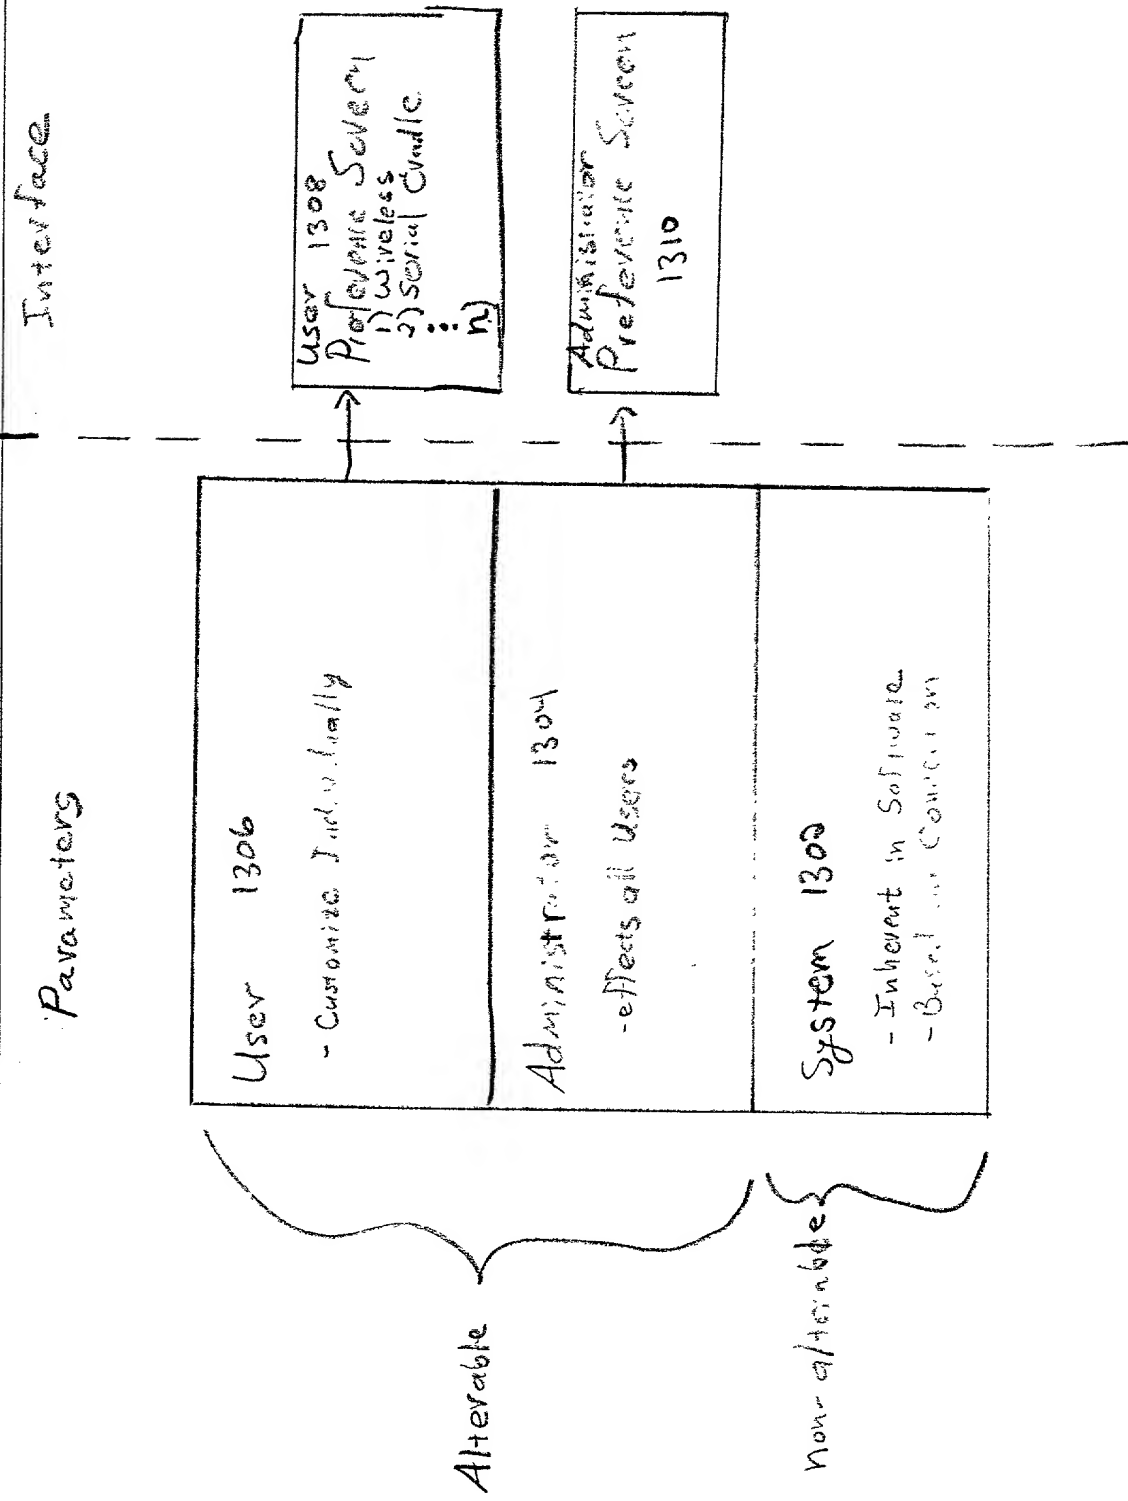


Figure 13

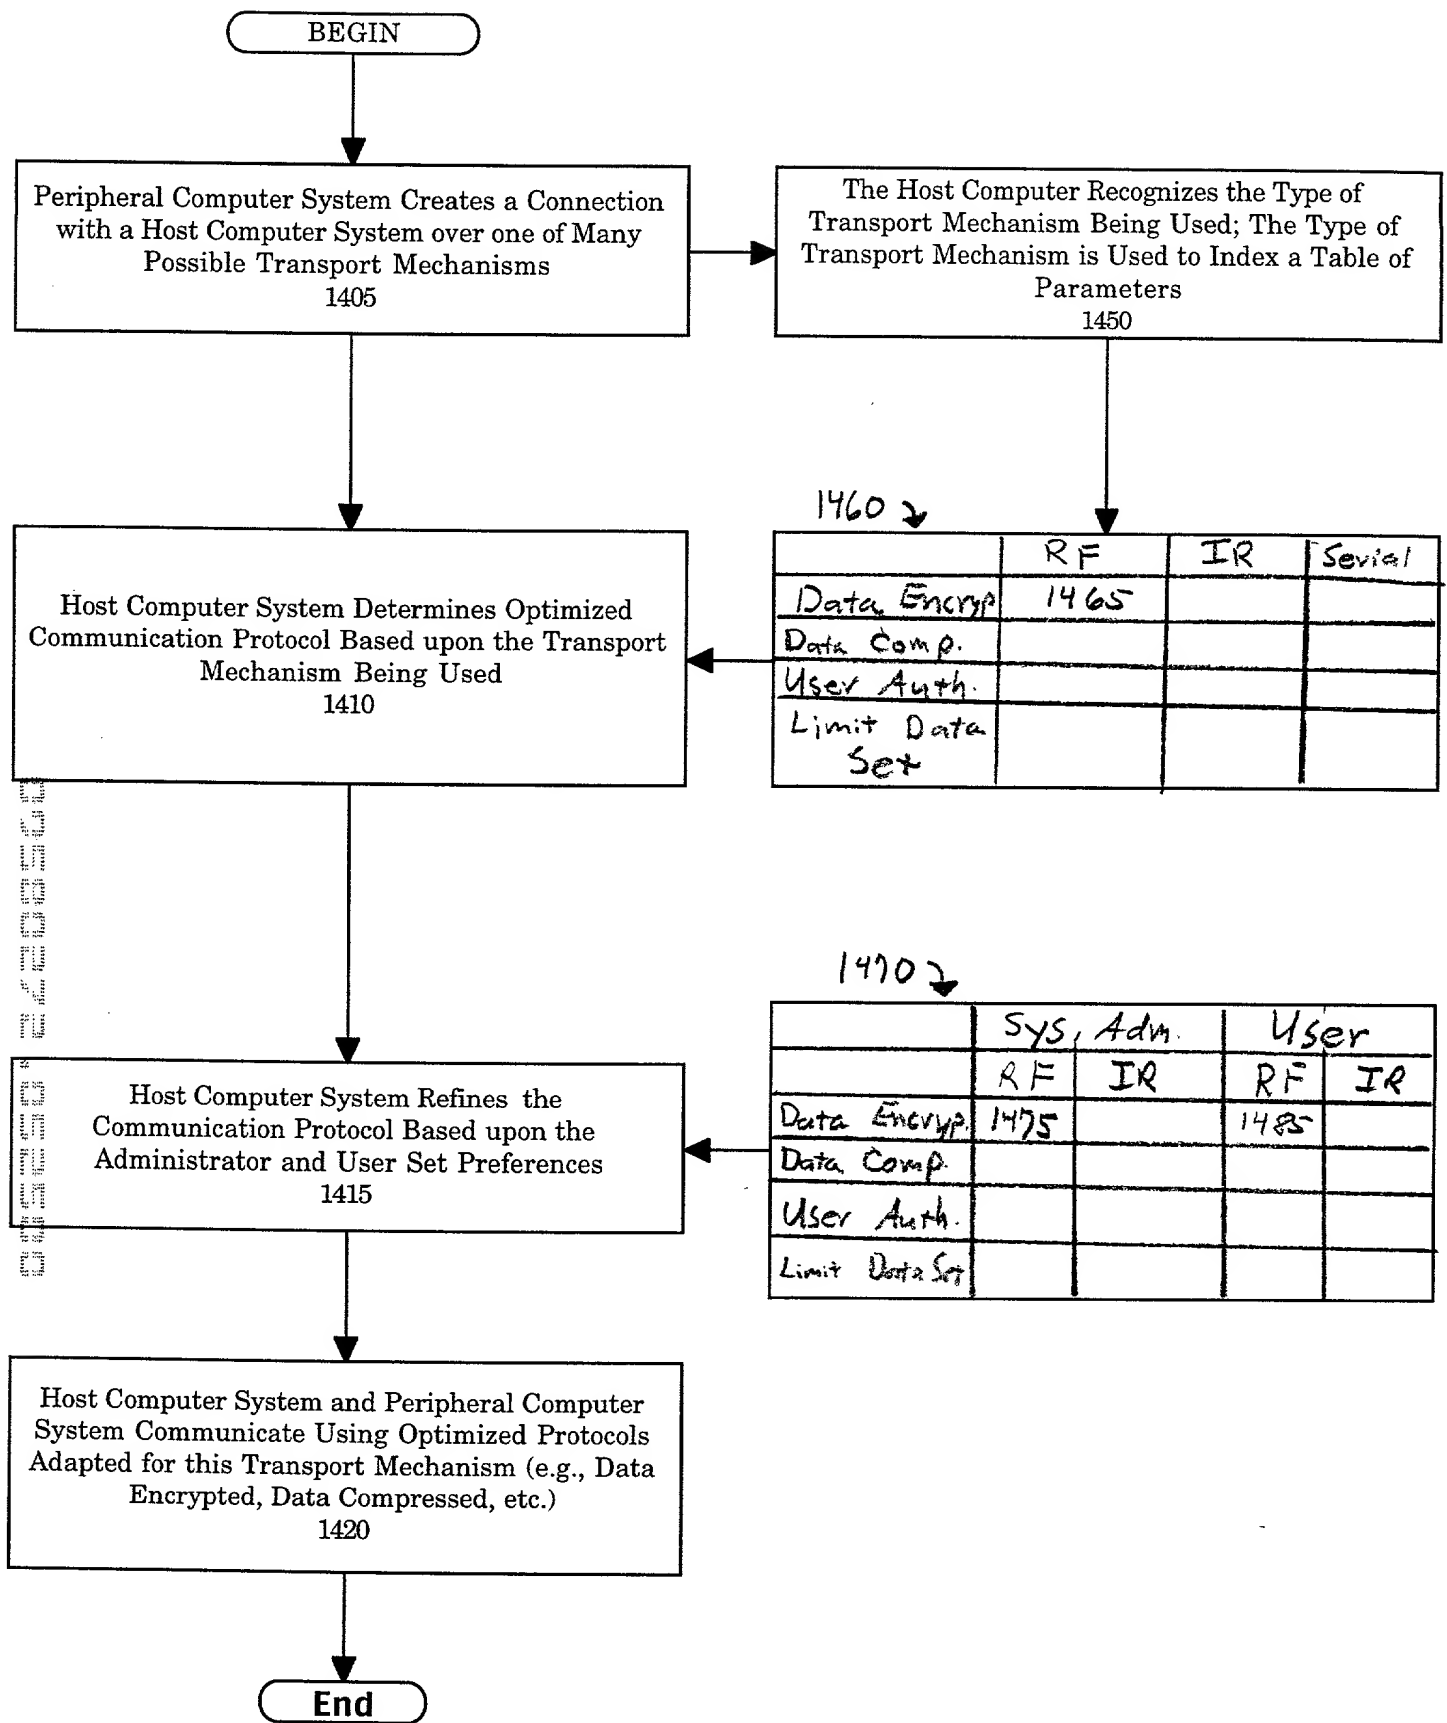


FIGURE 14

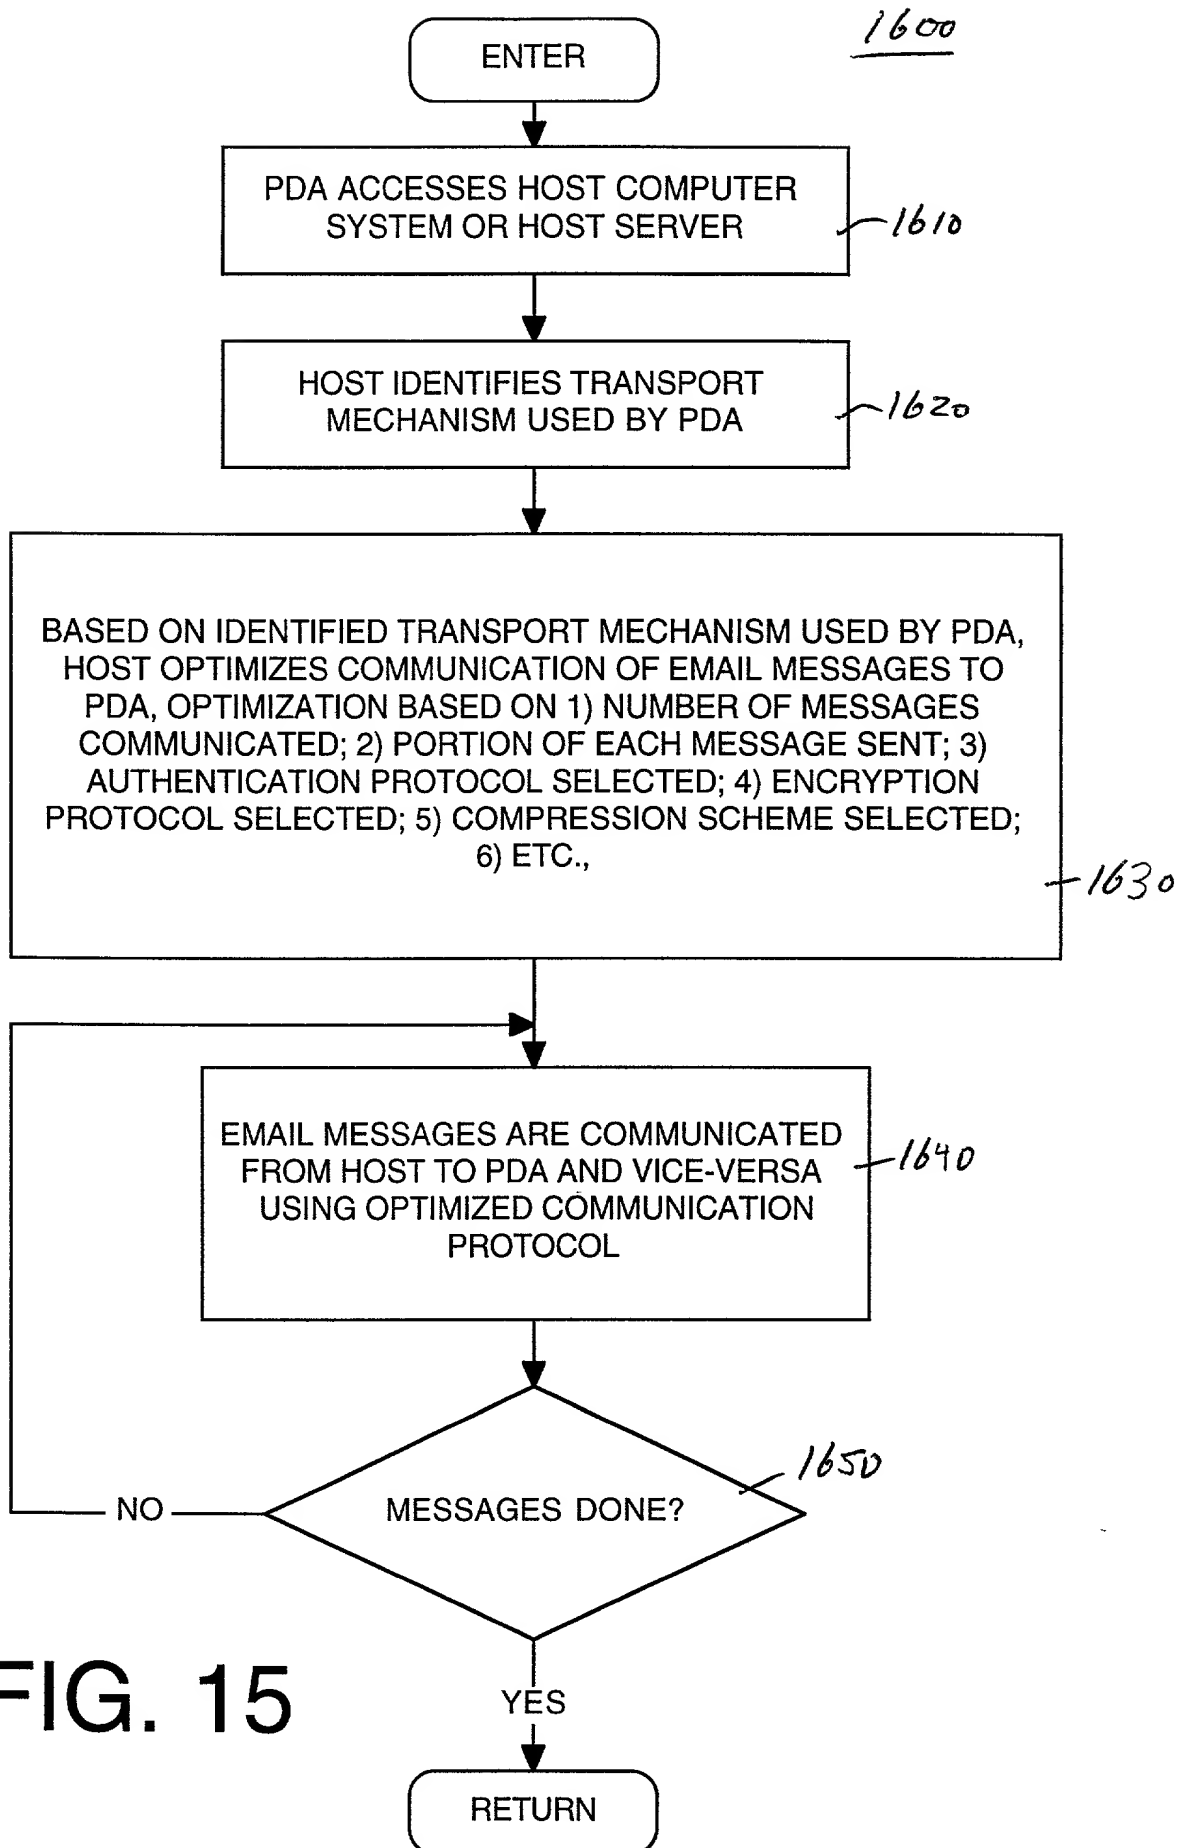


FIG. 15

## Declaration and Power of Attorney for a Patent Application

### Declaration

As below named inventor, I hereby declare that my residence post office address, and citizenship are as stated below my name. Further, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND SYSTEM FOR ADAPTIVE DATA SYNCHRONIZATION AND TRANSPORT ACROSS  
MULTIPLE DATA TRANSPORT INFRASTRUCTURE

the specification of which:

☒ is attached hereto, or  
..... was filed on ..... as application serial no. .... : and  
..... was amended on .....

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

### Foreign Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
.....	.....	.....	..... yes ..... no
.....	.....	.....	..... yes ..... no

### U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....	.....	.....
.....	.....	.....

**Power of Attorney**

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

James P. Hao	Registration No.: 36,398
Anthony C. Murabito	Registration No.: 35,295
John P. Wagner	Registration No.: 35,398
Glenn D. Barnes	Registration No.: 42,293
Thomas M. Catale	Registration No.: P-46,434
Jose S. Garcia	Registration No.: 43,628
Kenneth N. Glass	Registration No.: 42,587
Wilfred H. Lam	Registration No.: 41,923
Patrick W. Ma	Registration No.: 44,215
Christopher R. Novak	Registration No.: 42,041
Ronald M. Pomerence	Registration No.: 43,009
William A. Zarbis	Registration No.: 46,120

Send Correspondence to:

**WAGNER, MURABITO & HAO LLP**  
 Two North Market Street  
 Third Floor  
 San Jose, California 95113  
 (408) 938-9060

**Signatures**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Rocco A. DiValentino

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
 Residence Farmington, CT \_\_\_\_\_ Citizenship USA \_\_\_\_\_  
 (City State)  
 P.O. Address 321 Main Street Elm Suite, Farmington, CT 06032